



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTHP09G130A-CY

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply	208/230V/60	
Cooling		
Capacity	Btu/h	9000/9200
Input	W	790/805
Rated current	A	3.6/3.9
EER	Btu/w	11.4/11.4

Heating		
Capacity	Btu/h	7800/8000
Rated Input (elect. Heater)	Kw	2500/3050
Rated current	A	12/13.2
Max. Current	A	NA

Compressor Electrical		
Model	39X192GD&5JLA	
Type	ROTARY	
Brand	RECHI	
Capacitor	mF	25
Refrigerant type	oz	R32/18.7

Air flow & Noise level		
Indoor air flow	CFM	365/412
Indoor noise level	dB(A)	39/48
Outdoor noise level	dB(A)	66

Indoor Fan Motor		
Model	YDK-25-4	
Input	W	60
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	850/1100

Accessories	
Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A




Outdoor Fan Motor		
Model	YDK-55-4P2-4	
Input	W	104
Speed	RPM	1600

Dimensional Data		
Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3x24.8x18.9
Net/Gross weight	lbs.	94.80/105.82

System Data	
Design pressure	232/493 PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug		
Cord Length	ft.	6.5
Plug Face	Nema	6-20P

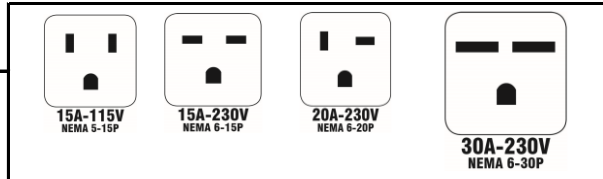

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535